


MATERIALS NEEDED

- A . 1/2" plywood, grade CDX and 2" x 4" by 8' construction grade lumber.
- B . 3/8" by 12" carriage bolts (rounded head on weather side).
- C . 3/8" construction grade nuts.
- D . Flat washers with an inside diameter large enough to bypass the wrench neck inside the carriage bolt head so no lift edge is available beneath an installed carriage bolt head.
- E . 1/2" diameter flat washers for installation beneath the nut inside the building.
- F . 1-5/8" (6d) galvanized or stainless steel ring-shank nails or comparable deck nails.

WINDOWS

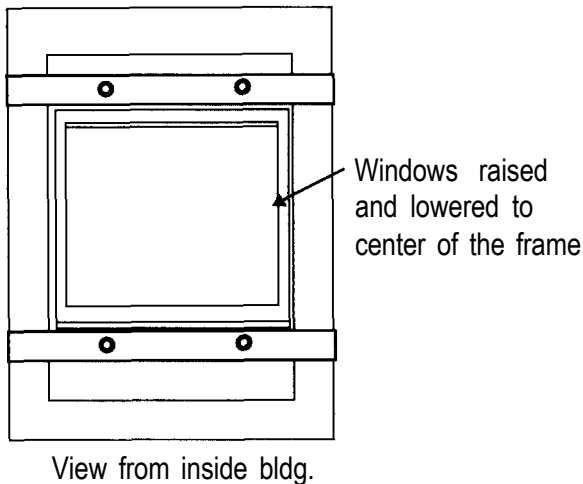

Note: Outside view of window is same as view from outside door except with two 2x4 braces instead of three.

DOORS

